arXiv:1202.1254v1 [cs.IT] 6 Feb 2012

Optimal Sum-Rate of the Vector Gaussian CEO Problem

Ersen Ekrem Sennur Ulukus
Department of Electrical and Computer Engineering
University of Maryland, College Park, MD 20742
ersen@umd.edu *ulukus@umd.edu*

***Abstract*—We study the vector Gaussian CEO problem, and obtain the optimal sum-rate that attains any given distortion. We show that the evaluation of the Berger-Tung inner bound with jointly Gaussian auxiliary random variables is optimal. We prove this optimality result by using channel enhancement in conjunction with a recent outer bound for the rate-distortion region of the vector Gaussian CEO problem.**

I. INTRODUCTION

We study the vector Gaussian CEO problem, where there is a vector Gaussian source which is observed through some linear additive vector Gaussian channels by an arbitrary number of agents. The agents process their observations independently and communicate them to a central unit (the so-called CEO) through orthogonal and rate-limited links (see Figure 1). The goal of the agents is to describe their observations to the CEO in a way that it can reconstruct the source within a given distortion. The trade-off between the rate spent by the agents and the distortion attained by the CEO is characterized by the rate-distortion region, which is unknown in general.

The CEO problem is introduced in [1] for a discrete memoryless setting, where the CEO is interested in estimating a discrete source with the minimum Hamming distance. Next, the scalar Gaussian CEO problem is introduced in [2], where there is a scalar Gaussian source which is observed through some linear Gaussian channels by the agents. The CEO wants to estimate the Gaussian source with the minimum mean square error (MMSE). In [2], it is shown that MMSE decays inversely proportionally with the rate expenditure of the agents, for sufficiently large number of agents. The scalar Gaussian CEO problem is further studied in [3], [4], where the entire rate-distortion region is characterized. The achievability of this region follows from the Berger-Tung inner bound [5], and the converse proof relies on the entropy-power inequality. Recently, [6] provided an alternative proof for the sum-rate of the scalar Gaussian CEO problem without invoking the entropy-power inequality.

Recently, two outer bounds for the rate-distortion region of the vector Gaussian CEO problem have been proposed in [7] and [8]. The outer bound in [7] is for the two-agent case, whereas the outer bound in [8] holds for any arbitrary number of agents. Beyond this difference, the proof techniques of these two outer bounds are different as well; yielding two different outer bounds. In [8], it is shown that the outer bound in [7] strictly includes the outer bound in [8]. Nonetheless, when one focuses on the sum-rate of the vector Gaussian CEO problem as we do here, both outer bounds yield the same lower bound for the sum-rate. In [8], it is also shown that the outer bound in [8] is not tight, i.e., it cannot provide the rate-distortion region in general.

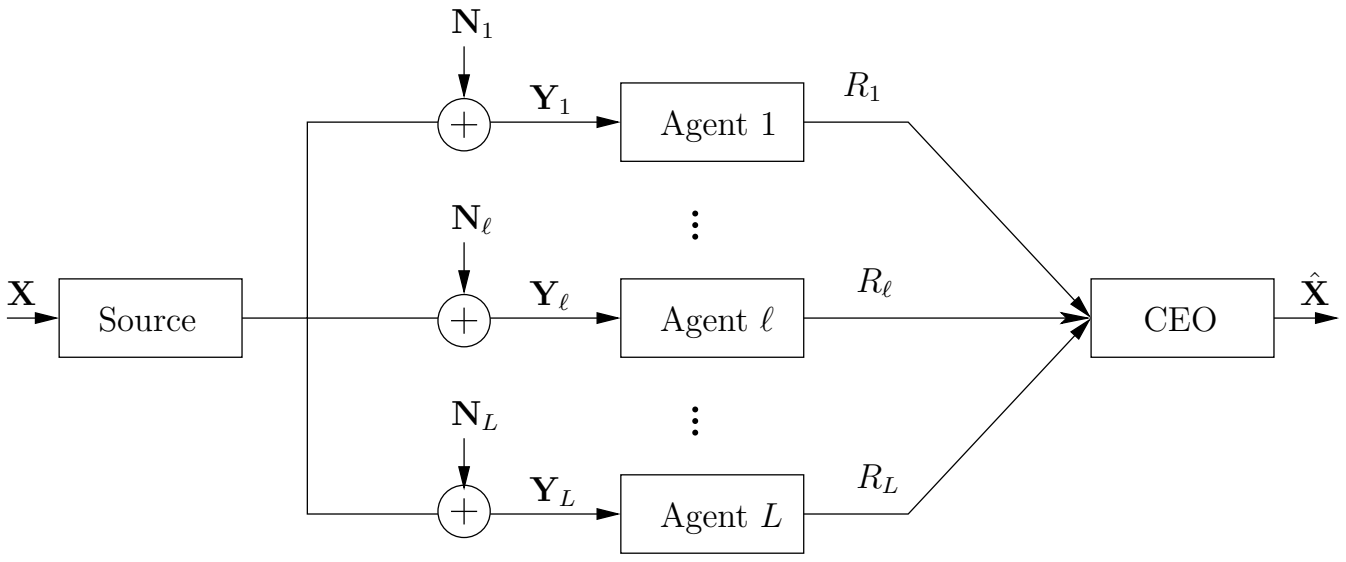

Fig. 1. The vector Gaussian CEO problem.

In this paper, we consider the sum-rate of the vector Gaussian CEO problem and show that the Berger-Tung inner bound [5], when it is evaluated with jointly Gaussian auxiliary random variables, attains the optimal sum-rate. We show the optimality of the Berger-Tung inner bound for the sum-rate in three main steps. In the first step, we optimize the Berger-Tung inner bound, and investigate the properties of this optimal Berger-Tung sum-rate. In the second step, we improve, i.e., *enhance*, the agents' observations by using the properties of the optimal achievable sum-rate obtained in the first step. This part is similar to *channel enhancement* proposed in [9]. The optimal sum-rate for the enhanced case provides a lower bound for the sum-rate of the original case. Finally, using the recent lower bound for the sum-rate given in [7], [8], we obtain the optimal sum-rate for the enhanced case, and show that the sum-rate of the enhanced case is equal to the sum-rate of the original case.

II. PROBLEM STATEMENT AND THE MAIN RESULT

In the CEO problem, there are L sensors, each of which getting a noisy observation of a source. The goal of the sensors is to describe their observations to the CEO such that the CEO can reconstruct the source within a given distortion. In the vector Gaussian CEO problem, there is an i.i.d. vector Gaussian source $\{\mathbf{X}_i\}_{i=1}^n$ with zero-mean and covariance $\mathbf{K}_X$.

This work was supported by NSF Grants CNS 09-64632, CCF 09-64645, CCF 10-18185, and CNS 11-47811.

Each sensor gets a noisy version of this Gaussian source

$$\mathbf{Y}_{\ell,i} = \mathbf{X}_i + \mathbf{N}_{\ell,i}, \quad \ell = 1, \ldots, L \tag{1}$$

where $\{\mathbf{N}_{\ell,i}\}_{i=1}^n$ is an i.i.d. sequence of Gaussian random vectors with zero-mean and covariance $\mathbf{\Sigma}_\ell$. Moreover, noise among the sensors are independent, i.e., $\mathbf{N}_{1,i}, \ldots, \mathbf{N}_{L,i}$ are independent for all i. The distortion of the reconstructed vector is measured by its mean square error matrix

$$\hat{\mathbf{D}}_n = \frac{1}{n} \sum_{i=1}^n E\left[\left(\mathbf{X}_i - \hat{\mathbf{X}}_i\right)\left(\mathbf{X}_i - \hat{\mathbf{X}}_i\right)^\top \right] \tag{2}$$

where $\hat{\mathbf{X}}^n$ denotes the reconstructed vector.

An $(n, R_1, \ldots, R_L)$ code for the CEO problem consists of an encoding function at each sensor $f_\ell^n : \mathbb{R}^{M\times n} \to \mathcal{B}_\ell^n = \{1, \ldots, 2^{nR_\ell}\}$, i.e., $B_\ell^n = f_\ell^n(\mathbf{Y}_\ell^n)$ where $B_\ell^n \in \mathcal{B}_\ell^n$, $\ell = 1, \ldots, L$, and a decoding function at the CEO $g^n : \mathcal{B}_1^n \times \ldots \times \mathcal{B}_L^n \to \mathbb{R}^{M\times n}$, i.e., $\hat{\mathbf{X}}^n = g^n(B_1^n, \ldots, B_L^n)$, where M denotes the size of the vector Gaussian source $\mathbf{X}$.

Since the MMSE estimator, which is the conditional mean, minimizes the mean square error, without loss of generality, the decoding function g^n can be chosen as the MMSE estimator. Hence, we have $\hat{\mathbf{X}}_i = E\left[\mathbf{X}_i | \{B_\ell^n\}_{\ell=1}^L\right]$ using which in (2), we get

$$\hat{\mathbf{D}}_n = \frac{1}{n} \sum_{i=1}^n \operatorname{mmse}(\mathbf{X}_i | B_1^n, \ldots, B_L^n) \tag{3}$$

Hence, a rate tuple $(R_1, \ldots, R_L)$ is said to achieve the distortion $\mathbf{D}$ if there exists an $(n, R_1, \ldots, R_L)$ code such that

$$\lim_{n\to\infty} \frac{1}{n} \sum_{i=1}^n \operatorname{mmse}(\mathbf{X}_i | B_1^n, \ldots, B_L^n) \preceq \mathbf{D} \tag{4}$$

where $\mathbf{D}$ is a positive definite matrix. Throughout the paper, we assume that the distortion matrix $\mathbf{D}$ satisfies

$$\left(\mathbf{K}_X^{-1} + \sum_{\ell=1}^L \mathbf{\Sigma}_\ell^{-1}\right)^{-1} \prec \mathbf{D} \prec \mathbf{K}_X \tag{5}$$

where the lower bound on the distortion constraint $\mathbf{D}$ corresponds to the MMSE matrix obtained when the CEO has direct access to the observations of the agents $\{\mathbf{Y}_\ell\}_{\ell=1}^L$. As pointed out in [8, Appendix A.2], imposing the lower bound on $\mathbf{D}$ in (5) does not incur any loss of generality, while imposing the upper bound on $\mathbf{D}$ in (5) might incur some loss of generality.

The rate-distortion region $\mathcal{R}(\mathbf{D})$ of the vector Gaussian CEO problem is defined as the closure of all rate tuples $(R_1, \ldots, R_L)$ that can achieve the distortion $\mathbf{D}$.

Here, we study the optimal sum-rate C_{sum} which is the minimum necessary sum-rate to attain the distortion $\mathbf{D}$:

$$C_{sum} = \min_{(R_1,\ldots,R_L)\in\mathcal{R}(\mathbf{D})} \sum_{\ell=1}^L R_\ell \tag{6}$$

The main result of this paper is the optimal sum-rate C_{sum} of the general vector Gaussian CEO problem, which is stated in the following theorem.

Theorem 1 *The optimal sum-rate C_{sum} for the vector Gaussian CEO problem is*

$$C_{sum} = \min_{\{\mathbf{D}_\ell^{-1}\}_{\ell=1}^L \in \mathcal{D}} \frac{1}{2} \log \frac{|\mathbf{K}_X^{-1} + \sum_{\ell=1}^L \mathbf{D}_\ell^{-1}|}{|\mathbf{K}_X^{-1}|} + \sum_{\ell=1}^L \frac{1}{2} \log \frac{|\mathbf{\Sigma}_\ell^{-1}|}{|\mathbf{\Sigma}_\ell^{-1} - \mathbf{D}_\ell^{-1}|} \tag{7}$$

where the feasible set $\mathcal{D}$ is given by the union of $\{\mathbf{D}_\ell^{-1}\}_{\ell=1}^L$ matrices[1] *satisfying*

$$\mathbf{0} \preceq \mathbf{D}_\ell^{-1} \preceq \mathbf{\Sigma}_\ell^{-1}, \quad \ell = 1, \ldots, L \tag{8}$$

$$\mathbf{K}_X^{-1} + \sum_{\ell=1}^L \mathbf{D}_\ell^{-1} = \mathbf{D}^{-1} \tag{9}$$

The achievability of the optimal sum-rate C_{sum} can be shown by evaluating the Berger-Tung inner bound [5] by jointly Gaussian auxiliary random variables [8, Theorem 2]:

Lemma 1 ([8, Theorem 2]) *The sum-rate $R_{sum}^{BT} = \sum_{\ell=1}^L R_\ell$ given by*

$$R_{sum}^{BT} = \min_{\{\mathbf{D}_\ell^{-1}\}_{\ell=1}^L \in \mathcal{D}^+} \frac{1}{2} \log \frac{|\mathbf{K}_X^{-1} + \sum_{\ell=1}^L \mathbf{D}_\ell^{-1}|}{|\mathbf{K}_X^{-1}|} + \sum_{\ell=1}^L \frac{1}{2} \log \frac{|\mathbf{\Sigma}_\ell^{-1}|}{|\mathbf{\Sigma}_\ell^{-1} - \mathbf{D}_\ell^{-1}|} \tag{10}$$

is achievable, where the feasible set $\mathcal{D}^+$ is given by the union of $\{\mathbf{D}_\ell^{-1}\}_{\ell=1}^L$ matrices satisfying

$$\mathbf{0} \preceq \mathbf{D}_\ell^{-1} \preceq \mathbf{\Sigma}_\ell^{-1}, \quad \ell = 1, \ldots, L \tag{11}$$

$$\left(\mathbf{K}_X^{-1} + \sum_{\ell=1}^L \mathbf{D}_\ell^{-1}\right)^{-1} \preceq \mathbf{D} \tag{12}$$

The converse proof of Theorem 1 uses *channel enhancement* [9] in conjunction with a recent lower bound for the sum-rate C_{sum} proved in [7], [8][2], which is stated below:

Lemma 2 ([7], [8]) *The optimal sum-rate of the vector Gaussian CEO problem is lower bounded as*

$$C_{sum} \geq \frac{1}{2} \log \frac{|\mathbf{K}_X|}{|\mathbf{D}|} + \min_{\{\mathbf{D}_\ell^{-1}\}_{\ell=1}^L \in \mathcal{D}^+} \sum_{\ell=1}^L \frac{1}{2} \log \frac{|\mathbf{\Sigma}_\ell^{-1}|}{|\mathbf{\Sigma}_\ell^{-1} - \mathbf{D}_\ell^{-1}|} \tag{13}$$

where $\mathcal{D}^+$ is given by the union of $\{\mathbf{D}_\ell^{-1}\}_{\ell=1}^L$ matrices satisfying (11)-(12).

---

[1] The notation $\mathbf{D}_\ell^{-1}$ might lead the reader to think that the inverse of $\mathbf{D}_\ell^{-1}$, i.e., $\mathbf{D}_\ell = (\mathbf{D}_\ell^{-1})^{-1}$ exists. However, here, we use the notation $\mathbf{D}_\ell^{-1}$ for the notational consistency; but not to emphasize that $\mathbf{D}_\ell^{-1}$ is an invertible matrix. In fact, $\mathbf{D}_\ell^{-1}$ might be positive semi-definite, i.e., we might have that $|\mathbf{D}_\ell^{-1}| = 0$, and hence, non-invertible.

[2] The outer bound in [7] and the outer bound in [8] are not identical, and, in fact, the former one strictly includes the latter one. However, both these outer bounds coincide for the sum-rate. A detailed comparison of these two outer bounds can be found in [8].

As stated in [7], [8], the lower bound in Lemma 2 is tight if the distortion constraint in (12) is met with equality. Hence, in our work here, to obtain the optimal sum-rate C_{sum}, we show that for the sum-rate, at the optimality, the distortion constraint is met with equality. We prove this by using channel enhancement [9]. However, intuitively, this result can be understood by noting that both the rate expression in Theorem 1 and the rate expression in Lemma 2 are monotonically increasing in the positive semi-definite matrices $\{\mathbf{D}_\ell^{-1}\}_{\ell=1}^L$, and hence the optimal $\{\mathbf{D}_\ell^{-1}\}_{\ell=1}^L$ matrices should be on the boundary of the feasible regions. Consequently, one expects that they might satisfy the distortion constraint with equality. However, it is not straightforward to verify this intuition, since the optimization problems we address are in the form of semi-definite programming.

III. Converse Proof of Theorem 1

Here, we first characterize the optimal Berger-Tung achievable sum-rate, and next, using the properties of this optimal achievable sum-rate in conjunction with channel enhancement and the lower bound in Lemma 2, we prove Theorem 1.

A. Optimizing the Berger-Tung Achievable Sum-Rate

In this section, we characterize this optimal achievable sum-rate R_{sum}^{BT} given in Lemma 1 (see (10)), and the optimal covariance matrices $\{\mathbf{D}_\ell^{-1}\}_{\ell=1}^L$ attaining R_{sum}^{BT}. Since the objective function in (10) is continuous and the feasible set $\mathcal{D}^+$ is convex, the optimal covariance matrices $\{\mathbf{D}_\ell^{-1}\}_{\ell=1}^L$ should satisfy certain KKT conditions. Now, we obtain the KKT optimality conditions. First, we note that the Lagrangian for the optimization problem in (10) is given by

$$\mathcal{L} = \log \frac{|\mathbf{K}_X^{-1} + \sum_{\ell=1}^L \mathbf{D}_\ell^{-1}|}{|\mathbf{K}_X^{-1}|} + \sum_{\ell=1}^L \log \frac{|\mathbf{\Sigma}_\ell^{-1}|}{|\mathbf{\Sigma}_\ell^{-1} - \mathbf{D}_\ell^{-1}|} - \sum_{\ell=1}^L \mathrm{tr}(\mathbf{M}_\ell \mathbf{D}_\ell^{-1}) - \mathrm{tr}\left[\mathbf{M}_D \left(\mathbf{K}_X^{-1} + \sum_{\ell=1}^L \mathbf{D}_\ell^{-1} - \mathbf{D}^{-1}\right)\right] \tag{14}$$

where the positive semi-definite matrices $\{\mathbf{M}_\ell\}_{\ell=1}^L, \mathbf{M}_D$ denote the Lagrange multipliers. In (14), we did not consider the constraints $\mathbf{D}_\ell^{-1} \preceq \mathbf{\Sigma}_\ell^{-1}$ because at the optimality, we should have $\mathbf{D}_\ell^{-1} \prec \mathbf{\Sigma}_\ell^{-1}$, since otherwise, the cost function goes to infinity. Using (14), the KKT conditions that the optimal $\{\mathbf{D}_\ell^{-1}\}_{\ell=1}^L$, denoted by $\{\tilde{\mathbf{D}}_\ell^{-1}\}_{\ell=1}^L$, should satisfy are given by

$$\left(\mathbf{K}_X^{-1} + \sum_{\ell=1}^L \tilde{\mathbf{D}}_\ell^{-1}\right)^{-1} + \left(\mathbf{\Sigma}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}\right)^{-1} = \mathbf{M}_\ell + \mathbf{M}_D \tag{15}$$

$$\mathbf{M}_\ell \tilde{\mathbf{D}}_\ell^{-1} = \tilde{\mathbf{D}}_\ell^{-1} \mathbf{M}_\ell = \mathbf{0} \tag{16}$$

$$\mathbf{M}_D \left(\mathbf{K}_X^{-1} + \sum_{\ell=1}^L \tilde{\mathbf{D}}_\ell^{-1} - \mathbf{D}^{-1}\right) = \mathbf{0} \tag{17}$$

where the first KKT condition in (15) comes from the fact that at the optimality, the gradient of the Langrangian in (14) with respect to $\mathbf{D}_\ell^{-1}$ should vanish $\forall \ell \in \{1, \ldots, L\}$, and the other KKT conditions in (16)-(17) correspond to the complementary slackness conditions on the Langrange multipliers.

Next, we investigate the KKT conditions in (15)-(17). To this end, we first introduce some notation. Let $\mathbf{A}$ be a symmetric positive semi-definite matrix with its orthonormal eigenvectors denoted by $\{\boldsymbol{\beta}_j\}_{j=1}^m$. Let $\mathbf{A} = \sum_{j=1}^{r_A} \lambda_j \boldsymbol{\beta}_j \boldsymbol{\beta}_j^\top$ be the spectral decomposition of $\mathbf{A}$, where $r_A = \mathrm{rank}(\mathbf{A}) \leq m$. We denote $\mathrm{span}(\{\boldsymbol{\beta}_j\}_{j=1}^{r_A})$ and $\mathrm{span}(\{\boldsymbol{\beta}_j\}_{j=r_A+1}^{m})$ by $\mathrm{span}(\mathbf{A})$ and $\mathrm{span}(\mathbf{A}^\perp)$, respectively. We note that $\mathrm{span}(\mathbf{A})$ and $\mathrm{span}(\mathbf{A}^\perp)$ are orthogonal, i.e., if $\mathbf{x} \in \mathrm{span}(\mathbf{A})$ and $\mathbf{y} \in \mathrm{span}(\mathbf{A}^\perp)$, then $\mathbf{x}^\top \mathbf{y} = 0$.

Now, we have the following lemma.

Lemma 3

$$\bigcap_{\ell=1}^L \mathrm{span}(\mathbf{M}_\ell) = \emptyset \tag{18}$$

Proof: We prove this lemma by contradiction. Assume $\exists \mathbf{x} \neq \mathbf{0}$ such that $\mathbf{x} \in \bigcap_{\ell=1}^L \mathrm{span}(\mathbf{M}_\ell)$. Next, we note that since $\mathbf{M}_\ell$ and $\tilde{\mathbf{D}}_\ell^{-1}$ commute, i.e., $\tilde{\mathbf{D}}_\ell^{-1}\mathbf{M}_\ell = \mathbf{M}_\ell \tilde{\mathbf{D}}_\ell^{-1}$, they share the same eigenspace. Moreover, since they are orthogonal, we have the fact that $\mathrm{span}(\mathbf{M}_\ell)$ and $\mathrm{span}(\tilde{\mathbf{D}}_\ell^{-1})$ are orthogonal. Hence, since, by assumption, $\mathbf{x} \in \mathrm{span}(\mathbf{M}_\ell),\ \ell = 1, \ldots, L$, we have $\mathbf{x}^\top \tilde{\mathbf{D}}_\ell^{-1} \mathbf{x} = 0, \quad \ell = 1, \ldots, L$, which implies that

$$\mathbf{x}^\top \left(\mathbf{K}_X^{-1} + \sum_{\ell=1}^L \tilde{\mathbf{D}}_\ell^{-1} - \mathbf{D}^{-1}\right)\mathbf{x} = \mathbf{x}^\top (\mathbf{K}_X^{-1} - \mathbf{D}^{-1})\mathbf{x} \tag{19}$$

$$< 0 \tag{20}$$

where we use the assumption that $\mathbf{D} \prec \mathbf{K}_X$.

On the other hand, since $\{\tilde{\mathbf{D}}_\ell^{-1}\}_{\ell=1}^L \in \mathcal{D}^+$, we have

$$\mathbf{K}_X^{-1} + \sum_{\ell=1}^L \tilde{\mathbf{D}}_\ell^{-1} - \mathbf{D}^{-1} \succeq \mathbf{0} \tag{21}$$

which implies that

$$\mathbf{x}^\top \left(\mathbf{K}_X^{-1} + \sum_{\ell=1}^L \tilde{\mathbf{D}}_\ell^{-1} - \mathbf{D}^{-1}\right)\mathbf{x} \geq 0 \tag{22}$$

which in view of (20) yields a contradiction; completing the proof. ■

Using this lemma, we can prove the following fact.

Lemma 4

$$\bigcup_{\ell=1}^L \mathrm{span}(\mathbf{M}_\ell^\perp) = \mathbb{R}^m \tag{23}$$

Proof: We prove this lemma by contradiction. Assume $\exists \mathbf{x} \neq \mathbf{0}$ such that $\mathbf{x} \in \mathbb{R}^m$ and $\mathbf{x} \notin \bigcup_{\ell=1}^L \mathrm{span}(\mathbf{M}_\ell^\perp)$. Since $\mathbf{x} \notin \bigcup_{\ell=1}^L \mathrm{span}(\mathbf{M}_\ell^\perp)$, we should have that $\mathbf{x} \in \mathrm{span}(\mathbf{M}_\ell),\ \ell = 1, \ldots, L$, which contradicts with Lemma 3; completing the proof. ■

Next, we have the following lemma.

Lemma 5

$$\mathbf{M}_D \succ \left(\mathbf{K}_X^{-1} + \sum_{\ell=1}^{L} \tilde{\mathbf{D}}_\ell^{-1}\right)^{-1} \succ \mathbf{0} \tag{24}$$

Proof: To prove this lemma, we need to show

$$\mathbf{x}^\top \left[\mathbf{M}_D - \left(\mathbf{K}_X^{-1} + \sum_{\ell=1}^{L} \tilde{\mathbf{D}}_\ell^{-1}\right)^{-1}\right] \mathbf{x} > 0 \tag{25}$$

for all $\mathbf{x} \in \mathbb{R}^m,\ \mathbf{x} \neq \mathbf{0}$.

Pick any $\mathbf{x} \in \mathbb{R}^m$. Since $\mathbb{R}^m = \bigcup_{\ell=1}^{L} \operatorname{span}(\mathbf{M}_\ell^\perp)$ (due to Lemma 4), $\exists \ell^*$ such that $\mathbf{x} \in \operatorname{span}(\mathbf{M}_{\ell^*}^\perp)$. Now, we consider the following

$$\begin{aligned}
\mathbf{x}^\top &\left[\mathbf{M}_D - \left(\mathbf{K}_X^{-1} + \sum_{\ell=1}^{L} \tilde{\mathbf{D}}_\ell^{-1}\right)^{-1}\right] \mathbf{x} \\
&= \mathbf{x}^\top \left[\left(\mathbf{\Sigma}_{\ell^*}^{-1} - \tilde{\mathbf{D}}_{\ell^*}^{-1}\right)^{-1} - \mathbf{M}_{\ell^*}\right] \mathbf{x} && (26) \\
&= \mathbf{x}^\top \left(\mathbf{\Sigma}_{\ell^*}^{-1} - \tilde{\mathbf{D}}_{\ell^*}^{-1}\right)^{-1} \mathbf{x} && (27) \\
&> 0 && (28)
\end{aligned}$$

where (26) follows from the KKT condition in (15), (27) is due to the fact that $\mathbf{x} \in \operatorname{span}(\mathbf{M}_{\ell^*}^\perp)$, and (28) follows because $\tilde{\mathbf{D}}_{\ell^*}^{-1} \prec \mathbf{\Sigma}_{\ell^*}^{-1}$. Equation (28) implies that the condition in (25) is satisfied; completing the proof. ■

Lemma 5 and the KKT condition in (17) imply that the distortion constraint is met with equality:

Lemma 6

$$\mathbf{D}^{-1} = \mathbf{K}_X^{-1} + \sum_{\ell=1}^{L} \tilde{\mathbf{D}}_\ell^{-1} \tag{29}$$

Now, we consider the remaining Langrange multipliers.

Lemma 7

$$\mathbf{\Sigma}_\ell \succ \mathbf{M}_\ell, \quad \ell = 1, \ldots, L \tag{30}$$

Proof: Using Lemma 5 and the KKT condition in (15), we have

$$\begin{aligned}
\left(\mathbf{\Sigma}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}\right)^{-1} - \mathbf{M}_\ell &= \mathbf{M}_D - \left(\mathbf{K}_X^{-1} + \sum_{\ell=1}^{L} \tilde{\mathbf{D}}_\ell^{-1}\right)^{-1} && (31) \\
&\succ \mathbf{0} && (32)
\end{aligned}$$

which, in view of the fact $\left(\mathbf{\Sigma}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}\right)^{-1} \succ \mathbf{0}$, implies

$$\left(\mathbf{\Sigma}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}\right) - \left(\mathbf{\Sigma}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}\right) \mathbf{M}_\ell \left(\mathbf{\Sigma}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}\right) \succ \mathbf{0} \tag{33}$$

Using the KKT condition in (16) in (33), we get

$$\mathbf{\Sigma}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1} - \mathbf{\Sigma}_\ell^{-1} \mathbf{M}_\ell \mathbf{\Sigma}_\ell^{-1} \succ \mathbf{0} \tag{34}$$

which, in view of the facts that $\mathbf{\Sigma}_\ell^{-1} \succ \mathbf{0}$, $\tilde{\mathbf{D}}_\ell^{-1} \succeq \mathbf{0}$, and $\mathbf{M}_\ell \succeq \mathbf{0}$, implies that $\mathbf{\Sigma}_\ell - \mathbf{M}_\ell \succ \mathbf{0}$; completing the proof. ■

B. A Tight Outer Bound

In this section, we provide the converse proof of Theorem 1. The converse proof has three main steps. In the first step, we *enhance* the observations of the agents by using the properties of the optimal Berger-Tung sum-rate. This enhancement process leads to an enhanced CEO problem whose optimal sum-rate provides a lower bound for the sum-rate of the original CEO problem. This step is similar to the *channel enhancement* proposed in [9]. In the second step, we use the lower bound stated in Lemma 2 to obtain a lower bound for the optimal sum-rate of the enhanced problem. Finally, we complete the converse proof by showing that this lower bound for the enhanced problem is achievable in the original CEO problem.

First, we define the following covariance matrices

$$\tilde{\mathbf{\Sigma}}_\ell = \mathbf{\Sigma}_\ell - \mathbf{M}_\ell, \quad \ell = 1, \ldots, L \tag{35}$$

These new covariance matrices have the properties listed in the following lemma, whose proof is given in Appendix A.

Lemma 8 *For all $\ell = 1, \ldots, L$, we have*

i) $\mathbf{0} \prec \tilde{\mathbf{\Sigma}}_\ell \preceq \mathbf{\Sigma}_\ell$ (36)

ii) $\left(\tilde{\mathbf{\Sigma}}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}\right)^{-1} = \left(\mathbf{\Sigma}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}\right)^{-1} - \mathbf{M}_\ell$ (37)

iii) $\left(\tilde{\mathbf{\Sigma}}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}\right)^{-1} = \mathbf{M}_D - \mathbf{D} \succ \mathbf{0}$ (38)

iv) $\left(\tilde{\mathbf{\Sigma}}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}\right)^{-1} \tilde{\mathbf{\Sigma}}_\ell = \left(\mathbf{\Sigma}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}\right)^{-1} \mathbf{\Sigma}_\ell^{-1}$ (39)

Next, we consider the lower bound for C_{sum} given in Lemma 2. To this end, we note the following lemma which will be used subsequently.

Lemma 9 *The following function*

$$g(\mathbf{A}) = \log \frac{|\mathbf{A}|}{|\mathbf{A} - \mathbf{\Delta}|} \tag{40}$$

is monotonically decreasing in the positive definite matrices $\mathbf{A}$ *for* $\mathbf{A} \succ \mathbf{\Delta} \succeq \mathbf{0}$.

Hence, using Lemma 9 in conjunction with the fact that $\tilde{\mathbf{\Sigma}}_\ell^{-1} \succeq \mathbf{\Sigma}_\ell^{-1}$ (see (36) in Lemma 8) in Lemma 2, we have

$$\begin{aligned}
C_{sum} &\geq \frac{1}{2} \log \frac{|\mathbf{K}_X|}{|\mathbf{D}|} + \min_{\{\mathbf{D}_\ell^{-1}\}_{\ell=1}^{L} \in \mathcal{D}^+} \sum_{\ell=1}^{L} \frac{1}{2} \log \frac{|\tilde{\mathbf{\Sigma}}_\ell^{-1}|}{|\tilde{\mathbf{\Sigma}}_\ell^{-1} - \mathbf{D}_\ell^{-1}|} && (41) \\
&= \frac{1}{2} \log \frac{|\mathbf{K}_X|}{|\mathbf{D}|} + \min_{\{\mathbf{D}_\ell^{-1}\}_{\ell=1}^{L} \in \mathcal{D}^+} f(\{\mathbf{D}_\ell^{-1}\}_{\ell=1}^{L}) && (42)
\end{aligned}$$

Next, we show that the minimum in (42) is attained by the set of matrices $\{\tilde{\mathbf{D}}_\ell^{-1}\}_{\ell=1}^{L}$. To this end, we define

$$\mathbf{\Delta}_\ell = \tilde{\mathbf{D}}_\ell^{-1} - \mathbf{D}_\ell^{-1}, \quad \ell = 1, \ldots, L \tag{43}$$

Now, we consider the following difference

$$\delta_f = 2f(\{\tilde{\mathbf{D}}_\ell^{-1}\}_{\ell=1}^L) - 2f(\{\mathbf{D}_\ell^{-1}\}_{\ell=1}^L) \tag{44}$$

$$= \sum_{\ell=1}^L \log\left|\left(\tilde{\mathbf{\Sigma}}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}\right)^{-1} \mathbf{\Delta}_\ell + \mathbf{I}\right| \tag{45}$$

$$= \sum_{\ell=1}^L \log\left|\left(\mathbf{M}_D - \mathbf{D}\right) \mathbf{\Delta}_\ell + \mathbf{I}\right| \tag{46}$$

$$\leq L\log\left|\frac{1}{L}(\mathbf{M}_D - \mathbf{D})\sum_{\ell=1}^L \mathbf{\Delta}_\ell + \mathbf{I}\right| \tag{47}$$

$$= L\log\frac{\left|\sum_{\ell=1}^L\left(\mathbf{\Delta}_\ell + (\mathbf{M}_D - \mathbf{D})^{-1}\right)\right|}{|L(\mathbf{M}_D - \mathbf{D})^{-1}|} \tag{48}$$

$$= L\log\frac{\left|\sum_{\ell=1}^L \tilde{\mathbf{\Sigma}}_\ell^{-1} - \mathbf{D}_\ell^{-1}\right|}{\left|\sum_{\ell=1}^L \tilde{\mathbf{\Sigma}}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}\right|} \tag{49}$$

where (46) and (49) follow from (38) in Lemma 8, and we obtain (47) by using the fact that $\log|\cdot|$ is concave in positive semi-definite matrices.

Equation (12) implies that $\forall\{\mathbf{D}_\ell^{-1}\}_{\ell=1}^L \in \mathcal{D}^+$, we have

$$\sum_{\ell=1}^L \mathbf{D}_\ell^{-1} \succeq \mathbf{D}^{-1} - \mathbf{K}_X^{-1} = \sum_{\ell=1}^L \tilde{\mathbf{D}}_\ell^{-1} \tag{50}$$

where the equality follows from Lemma 6. Using (50) and the fact that $\log|\cdot|$ is monotonically increasing in positive semi-definite matrices in (49), we get

$$\delta_f \leq L\log\frac{\left|\sum_{\ell=1}^L \tilde{\mathbf{\Sigma}}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}\right|}{\left|\sum_{\ell=1}^L \tilde{\mathbf{\Sigma}}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}\right|} = 0 \tag{51}$$

which implies that

$$f(\{\tilde{\mathbf{D}}_\ell^{-1}\}_{\ell=1}^L) \leq \min_{\{\mathbf{D}_\ell\}_{\ell=1}^L \in \mathcal{D}^+} f(\{\mathbf{D}_\ell^{-1}\}_{\ell=1}^L) \tag{52}$$

Using (52) in (42), we get

$$C_{sum} \geq \frac{1}{2}\log\frac{|\mathbf{K}_X|}{|\mathbf{D}|} + \sum_{\ell=1}^L \frac{1}{2}\log\frac{|\tilde{\mathbf{\Sigma}}_\ell^{-1}|}{|\tilde{\mathbf{\Sigma}}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}|} \tag{53}$$

$$= \frac{1}{2}\log\frac{|\mathbf{K}_X|}{|\mathbf{D}|} + \sum_{\ell=1}^L \frac{1}{2}\log\frac{|\mathbf{\Sigma}_\ell^{-1}|}{|\mathbf{\Sigma}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}|} \tag{54}$$

$$= R_{sum}^{BT} \tag{55}$$

where (54) comes from (39) in Lemma 8. Since $R_{sum}^{BT} \geq C_{sum}$, (55) implies $C_{sum} = R_{sum}^{BT}$; completing the proof.

IV. CONCLUSIONS

We show that the Berger-Tung inner bound, when it is evaluated with jointly Gaussian auxiliary random variables, achieves the optimal sum-rate for the vector Gaussian CEO problem. We show the optimality of the Berger-Tung inner bound for the sum-rate by using channel enhancement [9] in conjunction with the recent outer bound for the rate-distortion region of the vector Gaussian CEO problem in [7], [8].

APPENDIX A
PROOF OF LEMMA 8

Equation (36) follows from (35) and Lemma 7. Next, we consider (37) as follows

$$\left(\mathbf{\Sigma}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}\right)^{-1} - \mathbf{M}_\ell$$

$$= \left(\mathbf{\Sigma}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}\right)^{-1}\left[\mathbf{I} - \left(\mathbf{\Sigma}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}\right)\mathbf{M}_\ell\right] \tag{56}$$

$$= \left(\mathbf{\Sigma}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}\right)^{-1}\left[\mathbf{I} - \mathbf{\Sigma}_\ell^{-1}\mathbf{M}_\ell\right] \tag{57}$$

$$= \left(\mathbf{\Sigma}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}\right)^{-1}\mathbf{\Sigma}_\ell^{-1}\left(\mathbf{\Sigma}_\ell - \mathbf{M}_\ell\right) \tag{58}$$

$$= \left(\mathbf{I} - \mathbf{\Sigma}_\ell\tilde{\mathbf{D}}_\ell^{-1}\right)^{-1}\left(\mathbf{\Sigma}_\ell - \mathbf{M}_\ell\right) \tag{59}$$

$$= \left[\mathbf{I} - \left(\mathbf{\Sigma}_\ell - \mathbf{M}_\ell\right)\tilde{\mathbf{D}}_\ell^{-1}\right]^{-1}\left(\mathbf{\Sigma}_\ell - \mathbf{M}_\ell\right) \tag{60}$$

$$= \left[\left(\mathbf{\Sigma}_\ell - \mathbf{M}_\ell\right)^{-1} - \tilde{\mathbf{D}}_\ell^{-1}\right]^{-1} \tag{61}$$

$$= \left(\tilde{\mathbf{\Sigma}}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}\right)^{-1} \tag{62}$$

where (57) and (60) follow from the KKT condition in (16), and (62) comes from the definition of $\tilde{\mathbf{\Sigma}}_\ell$ in (35).

Equation (38) can be obtained by plugging (37) into the KKT condition in (15), and noting Lemma 5 and Lemma 6.

Finally, we consider (39) as follows

$$\left(\tilde{\mathbf{\Sigma}}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}\right)^{-1}\tilde{\mathbf{\Sigma}}_\ell^{-1} = \mathbf{I} + \left(\tilde{\mathbf{\Sigma}}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}\right)^{-1}\tilde{\mathbf{D}}_\ell^{-1} \tag{63}$$

$$= \mathbf{I} + \left[\left(\mathbf{\Sigma}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}\right)^{-1} - \mathbf{M}_\ell\right]\tilde{\mathbf{D}}_\ell^{-1} \tag{64}$$

$$= \mathbf{I} + \left(\mathbf{\Sigma}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}\right)^{-1}\tilde{\mathbf{D}}_\ell^{-1} \tag{65}$$

$$= \left(\mathbf{\Sigma}_\ell^{-1} - \tilde{\mathbf{D}}_\ell^{-1}\right)^{-1}\mathbf{\Sigma}_\ell^{-1} \tag{66}$$

where (64) comes from (37), and (65) is due to the KKT condition in (16). Equation (66) gives us the desired result stated in (39); completing the proof.

REFERENCES

[1] T. Berger, Z. Zhang, and H. Viswanathan. The CEO problem. *IEEE Trans. Inf. Theory*, 42(3):887–902, May 1996.

[2] H. Viswanathan and T. Berger. The quadratic Gaussian CEO problem. *IEEE Trans. Inf. Theory*, 43(5):1549–1559, Sep. 1997.

[3] Y. Oohama. Rate-distortion theory for Gaussian multiterminal source coding systems with several side informations at the decoder. *IEEE Trans. Inf. Theory*, 51(7):2577–2593, Jul. 2005.

[4] V. Prabhakaran, D. Tse, and K. Ramchandran. Rate region of the quadratic Gaussian CEO problem. In *IEEE Intnl. Symp. Inf. Theory*, page 119, Jun. 2004.

[5] S.-Y. Tung. *Multiterminal source coding*. PhD thesis, Cornell University, Ithaca, NY, 1978.

[6] J. Wang, J. Chen, and X. Wu. On the sum rate of Gaussian multiterminal source coding: New proofs and results. *IEEE Trans. Inf. Theory*, 56(8):3946–3960, Aug. 2010.

[7] J. Chen and J. Wang. On the vector Gaussian CEO problem. In *IEEE ISIT*, pages 2050–2054, Aug. 2011.

[8] E. Ekrem and S. Ulukus. An outer bound for the vector Gaussian CEO problem. Submitted to *IEEE ISIT*, Feb. 2012. Journal version submittted *IEEE Trans. Inf. Theory*, Feb. 2012. Also available on arXiv.

[9] H. Weingarten, Y. Steinberg, and S. Shamai (Shitz). The capacity region of the Gaussian multiple-input multiple-output broadcast channel. *IEEE Trans. Inf. Theory*, 52(9):3936–3964, Sep. 2006.